

FIX 71

UNIVERSAL ADHESIVE SPRAY

Universal neoprene adhesive spray for home and industrial applications.

PROPERTIES

- Easy to use
- Fast grip
- Three positions valve for different width of application

AREA OF USE

- It can be used for bonding of metal, wood, glass, PU foam, paper, textile, cork, plastics, PE, nylon ...
This product is not to be used for carpet laying.

TECHNICAL DATA

Base	neoprene
Appearance	liquid
Smell	characteristic [similar to solvent]
Open time	2 - 13 min
Consumption	150 - 300 g/m ²
Dry matter content	25 - 27 %
Density [20 °C]	≥1g/cm ³
Viscosity [20 °C]	100 - 150 m Pas
The most suitable application temperature from 15 to 23 °C	

INSTRUCTIONS FOR USE

- Surfaces must be clean and free from dust and grease.
- Shake the dose well before use.
- Hold the can 15 to 20 cm away from the surface when spraying.
- Apply the adhesive uniformly on both surfaces that need to be glued.
- Wait 5 minutes until the adhesive is dry and then join both surfaces.
- Final bonding strength is achieved after 24 hours.
- After application, turn the can in an upside down position and spray it until the sprayer is free of adhesive.

PACKAGING

- 300 ml aerosol dose

STORAGE

18 months. Store the product in an upright position at a temperature of 5 - 35 °C, do not expose the product to direct sunlight.


HEALTH, SAFETY, HANDLING AND DISPOSAL INFORMATION

Additional safety information, safe handling instructions, information on personal protective equipment, and disposal information can be found in the safety data sheet. Safety data sheet available on request. You can also obtain a copy from your TKK sales representative.



WARNING

The information given is based on our tests and practical experience. However, due to specific conditions and working methods we recommend preliminary tests for each case of use.

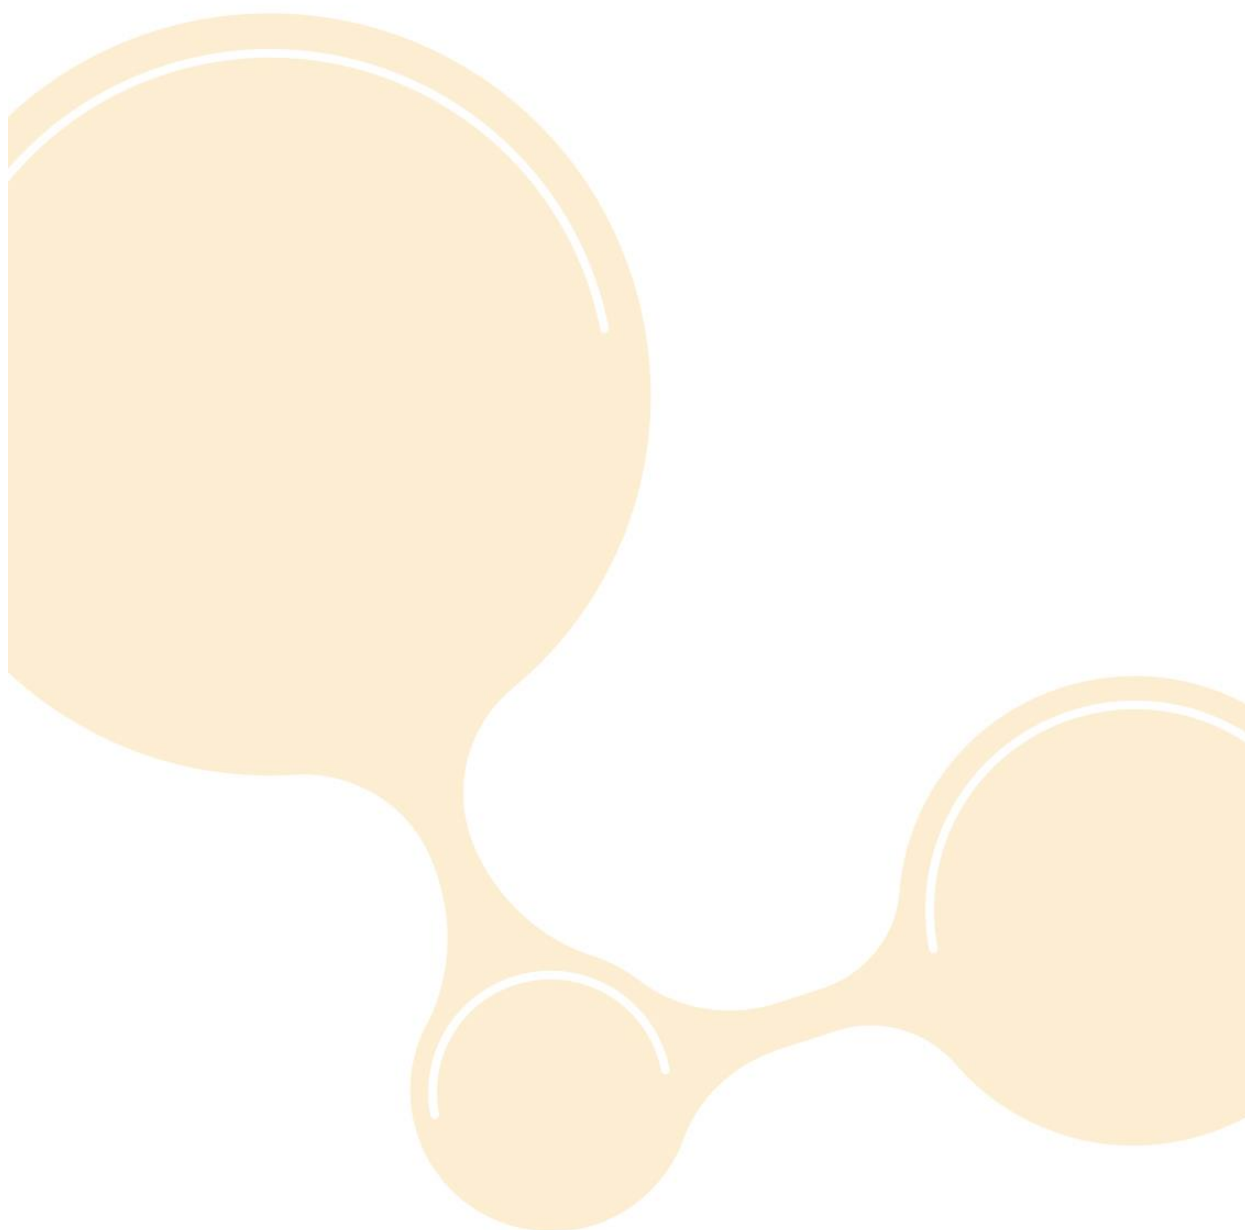

TKK d.o.o.
Srpenica 1, 5224 Srpenica, Slovenia
+386 5 38 41 300, tkk.si

Visit us on 
tkk-fix.com