

# FIX 14

## CONSTRUCTION ADHESIVE FOR POROUS MATERIALS AND STYROFOAM [EPS]

Construction adhesive based on acrylic dispersion with good adhesion on porous materials: wood, concrete, ceramic, stone, EPS and XPS, gypsum board ...

### PROPERTIES

- Solvent free.
- For indoor use.
- For porous materials.
- Replaces nails and screws.
- Easy to apply.
- Does not slide.
- Fast adhesion.
- The adhesive can be applied to damp surfaces.
- It is resistant to various atmospheric influences, sunlight, and aging.
- Fresh adhesive can be easily cleaned with water.
- Environmentally friendly.

### AREA OF USE

- It is used for gluing of different porous building materials which do not have carrying function, styrofoam, decorative ornaments, shelves, ceramic tiles, decorative wood trims ...
- To fill small cracks in walls.

### TECHNICAL DATA

#### Fresh mass

Base	acrylic dispersion
Appearance	paste
Specific weight	1340 ± 30 kg/m <sup>3</sup>
Skin formation time 23 °C/50 % rel. humid.	25–30 min.
Application temperature	from +5 °C to +40 °C

#### Cured mass

Tensile shear strength [EN 205]	3.10 ± 0.20 MPa
Temperature resistance	from -20 °C to +75 °C

### INSTRUCTIONS FOR USE

- Surfaces must be solid, clean and free of dust and grease. Remove all chipped and poorly bonded parts.
- Cut the cartridge at the top along the thread and screw on the tip, which you cut obliquely according to the desired thickness of the application.
- The adhesive can also be applied to damp surfaces.
- Apply adhesive evenly in spots or in lines on one of the glued surfaces.
- Join both surfaces together until the adhesive is still wet [in approx. 15 minutes].
- If necessary, fix heavy parts mechanically for 24 hours.
- After use, clean the fresh mass and tools with water, and the hardened mass with water or mechanically.



## PACKAGING

- 300 ml cartridge

## STORAGE


24 months in a dry place at a temperature between 5 °C and 25 °C, in the original sealed packaging.

## HEALTH, SAFETY, HANDLING AND DISPOSAL INFORMATION

Additional safety information, safe handling instructions, information on personal protective equipment, and disposal information can be found in the safety data sheet. Safety data sheet available on request. You can also obtain a copy from your TTK sales representative.

## WARNING

The information given is based on our tests and practical experience. However, due to specific conditions and working methods we recommend preliminary tests for each case of use.

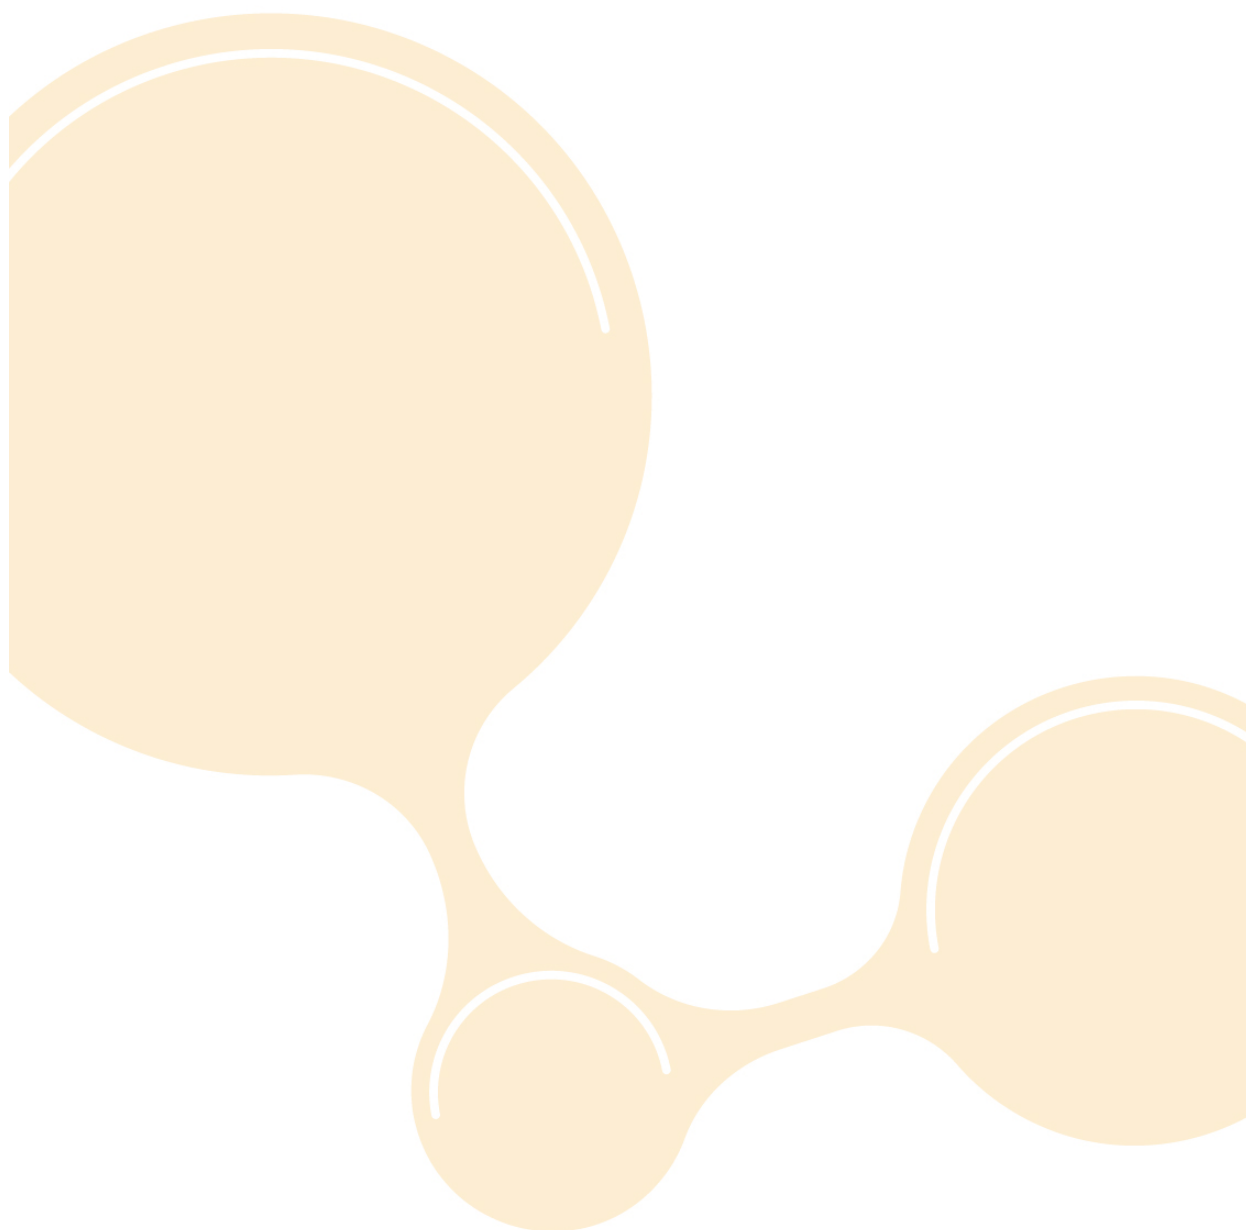

**TKK d.o.o.**  
Srpenica 1, 5224 Srpenica, Slovenia  
+386 5 38 41 300, tkk.si

Visit us on   
**tkk-fix.com**